


# OD-7009 / OD-7010

## WALL/CEILING MOUNT LIGHT

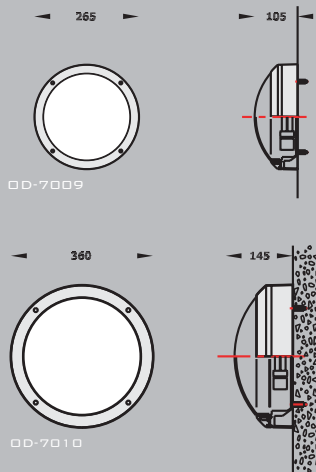


### SPECIFICATION


- CONSTRUCTION:** Fixture is manufactured in compliance with IEC 60598-1 and tested by UL Demko laboratory in Denmark. Electrical protection class 1. IP65.
- BODY:** Housing and cover ring in corrosion resistant high-pressure die-cast aluminium ADC12 alloy.
- OPTIC COVER:** Self-extinguishing high impact resistant opal polycarbonate diffuser. with UV stabilized additive. Material from Bayer - Germany or Teijin - Japan.
- PROTECTION:** Weather proof and durable silicone gasket. Service temperature -40°to +200°C.
- FASTENING:** All external screw is in 316 stainless steel with silicone grease dipping.
- CABLE ENTRY:** Protected by two weather proof IP67 PG11 synthesized rubber grommet for H07RN-F cable 3G x1.0 Possible for through wiring.
- LAMP HOLDER:** G23/G24d-2-3/Gx24q4 holder in PBT phosphor bronze contact from AAG Stucchi - Italy / ENEC approved. For compact fluorescent lamp. T140 rating 2A-250V. E27 ceramic nickle-coated contact from Vossloh Schwabe - Germany / ENEC approved. For incandescent/tungsten halogen lamp. T270 rating 4/250/5kV.
- CONTROL GEAR:** Magnetic ballast from Vossloh Schwabe - Germany / ENEC approved. 230V 50Hz tw130. For compact fluorescent lamp. B2 EEI class. High frequency electronic ballast from Vossloh Schwabe - Germany / ENEC approved. 220-240V 0-50-60Hz tc70 A2 EEI class. For 4 pins compact fluorescent lamp.
- WIRING:** 1x0.75 tinned copper silicone rubber insulated cable from CET Electric - Italy / IMQ approved. 2kV / -60°to +180°C service temperature. Connector in PA6.6 nickle-plated brass insert. 600V/24A. -40°to +130°C service temperature. Cross section 2.5mm<sup>2</sup> VDE approved. Wiring provided with earth connection.
- PAINTING:** First Stage: Chromatization treatment, resistant to corrosive and extreme environment. Second Stage: Coated with UV stabilized polyester powder in automatic chamber. Third Stage: Baked in digital temperature control room at 200°C for 30 minutes.

### AVAILABLE COLOR:


- Black - RAL9005 (replace last 2 digits on ordering code with 01)
- Graphite - RAL7016 (replace last 2 digits on ordering code with 02)
- Dark Grey - RAL7037 (replace last 2 digits on ordering code with 03)
- Aluminium Silver - RAL9006 (replace last 2 digits on ordering code with 04)
- White - RAL9010 (replace last 2 digits on ordering code with 06)




COMPACT FLUORESCENT  
 Ordering Code:  
**7009-0-3-414-XX**  
 TC G23  
 2x9W (2x600 lm)



COMPACT FLUORESCENT  
 Ordering Code:  
**7009-0-3-423-XX**  
 TC-D G24d-2  
 18W (1200 lm)



COMPACT FLUORESCENT  
 Ordering Code:  
**7010-0-3-428-XX**  
 TC-D G24d-3  
 2x26W (2x1800 lm)




COMPACT FLUORESCENT  
 Ordering Code:  
**7010-0-3-438-XX**  
 TC-TEL Gx24q-4  
 2x42W (2x3200 lm)




E27 COMPACT FLUORESCENT  
 Ordering Code:  
**7009-0-2-493-XX**  
 TC-TSE E27  
 15W (900 lm)

E27 COMPACT FLUORESCENT  
 Ordering Code:  
**7010-0-2-496-XX**  
 TC-TSE E27  
 2x23W (2x1500 lm)




INCANDESCENT  
 Ordering Code:  
**7009-0-2-111-XX**  
 A60 E27  
 60W (730 lm)



TUNGSTEN HALOGEN  
 Ordering Code:  
**7010-0-2-242-XX**  
 QT32 E27  
 100W (1550 lm)

# OD-7011 / OD-7012

WALL/CEILING MOUNT LIGHT

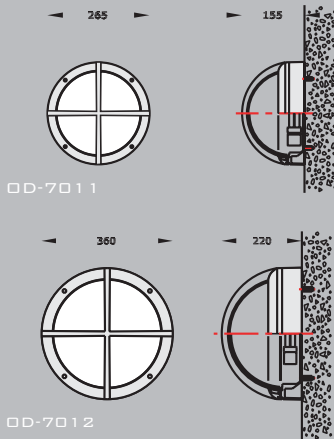


## SPECIFICATION

- CONSTRUCTION:** Fixture is manufactured in compliance with IEC 60598-1 and tested by UL Demko laboratory in Denmark. Electrical protection class 1. IP65.
- BODY:** Housing and cover ring in corrosion resistant high-pressure die-cast aluminium ADC12 alloy.
- OPTIC COVER:** Self-extinguishing high impact resistant opal polycarbonate diffuser. with UV stabilized additive. Material from Bayer - Germany or Teijin - Japan.
- PROTECTION:** Weather proof and durable silicone gasket. Service temperature -40° to +200°C.
- FASTENING:** All external screw is in 316 stainless steel with silicone grease dipping.
- CABLE ENTRY:** Protected by two weather proof IP67 PG11 synthesized rubber grommet for H07RN-F cable 3G x1.0 Possible for through wiring.
- LAMP HOLDER:** G23/G24d-2-3/Gx24q4 holder in PBT phosphor bronze contact from AAG Stucchi - Italy / ENEC approved. For compact fluorescent lamp. T140 rating 2A-250V. E27 ceramic nickel-coated contact from Vossloh Schwabe - Germany / ENEC approved. For tungsten halogen / discharge lamp. T270 rating 4/250/5kV.
- CONTROL GEAR:** Magnetic ballast from Vossloh Schwabe - Germany / ENEC approved. 230V 50Hz tw130. For discharge lamp and B2 class for compact fluorescent lamps. Electronic superimposed ignitor from Vossloh Schwabe - Germany / ENEC approved. Ignition voltage 1.8-2.3kV 220-240V 50-60Hz. For 35W - 70W discharge lamp. Power factor correction for discharge lamp from Vossloh Schwabe - Germany or from Electronicon - Germany. ENEC approved. High frequency electronic ballast from Vossloh Schwabe - Germany / ENEC approved. 220-240V 0-50-60Hz tc70 A2 EEI class. For 4 pins compact fluorescent lamp.
- WIRING:** 1x0.75 tinned copper silicone rubber insulated cable from CET Electric - Italy / IMQ approved. 2kV / -60° to +180°C service temperature. Double silicone insulation ignition wire. Tinned copper conductor. Impulsive voltage 5kV. Connector in PA6.6 nickel-plated brass insert. 600V/24A. -40° to +130°C service temperature. Cross section 2.5mm<sup>2</sup>. VDE approved. Wiring provided with earth connection.
- PAINTING:** First Stage: Chromatisation treatment, resistant to corrosive and extreme environment. Second Stage: Coated with UV stabilized polyester powder in automatic chamber. Third Stage: Baked in digital temperature control room at 200°C for 30 minutes.

## AVAILABLE COLOR:

- |                  |  |
|------------------|--|
| Black            | - RAL9005 (replace last 2 digits on ordering code with 01) |
| Graphite         | - RAL7016 (replace last 2 digits on ordering code with 02) |
| Dark Grey        | - RAL7037 (replace last 2 digits on ordering code with 03) |
| Aluminium Silver | - RAL9006 (replace last 2 digits on ordering code with 04) |
| White            | - RAL9010 (replace last 2 digits on ordering code with 06) |




METAL HALIDE  
 Ordering Code:  
**7012-0-3-711-XX**  
 HIE-CE E27  
 70W (5900 lm)

E27 COMPACT FLUORESCENT  
 Ordering Code:  
**7011-0-2-493-XX**  
 TC-TSE E27  
 15W (900 lm)


HIGH PRESSURE SODIUM  
 Ordering Code:  
**7012-0-3-611-XX**  
 HSE-1 E27  
 70W (6000 lm)

COMPACT FLUORESCENT  
 Ordering Code:  
**7012-0-2-496-XX**  
 TC-TSE E27  
 2x23W (2x1500 lm)


MERCURY VAPOUR  
 Ordering Code:  
**7012-0-3-511-XX**  
 HME E27  
 80W (4000 lm)




INCANDESCENT  
 Ordering Code:  
**7011-0-2-111-XX**  
 A60 E27  
 60W (730 lm)




COMPACT FLUORESCENT  
 Ordering Code:  
**7011-0-3-414-XX**  
 TC G23  
 2x9W (2x600 lm)




TUNGSTEN HALOGEN  
 Ordering Code:  
**7012-0-2-242-XX**  
 QT32 E27  
 100W (1550 lm)



COMPACT FLUORESCENT  
 Ordering Code:  
**7011-0-3-423-XX**  
 TC-D G24d-2  
 18W (1200 lm)



COMPACT FLUORESCENT  
 Ordering Code:  
**7012-0-3-428-XX**  
 TC-D G24d-3  
 2x26W (2x1800 lm)



COMPACT FLUORESCENT  
 Ordering Code:  
**7012-0-3-438-XX**  
 TC-TEL Gx24q-4  
 2x42W (2x3200 lm)



# OD-7013 / OD-7014

WALL/CEILING MOUNT LIGHT






## SPECIFICATION

- CONSTRUCTION:** Fixture is manufactured in compliance with IEC 60598-1 and tested by UL Demko laboratory in Denmark. Electrical protection class 1. IP65.
- BODY:** Housing and cover ring in corrosion resistant high-pressure die-cast aluminium ADC12 alloy.
- OPTIC COVER:** Self-extinguishing high impact resistant opal polycarbonate diffuser. with UV stabilized additive. Material from Bayer - Germany or Teijin - Japan.
- PROTECTION:** Weather proof and durable silicone gasket. Service temperature -40°to +200°C.
- FASTENING:** All external screw is in 316 stainless steel with silicone grease dipping.
- CABLE ENTRY:** Protected by two weather proof IP67 PG11 synthesized rubber grommet for H07RN-F cable 3G x1.0 Possible for through wiring.
- LAMP HOLDER:** G23/G24d-2-3/Gx24q4 holder in PBT phosphor bronze contact from AAG Stucchi - Italy / ENEC approved. For compact fluorescent lamp. T140 rating 2A-250V. E27 ceramic nickle-coated contact from Vossloh Schwabe - Germany / ENEC approved. For incandescent/tungsten halogen lamp. T270 rating 4/250/5kV.
- CONTROL GEAR:** Magnetic ballast from Vossloh Schwabe - Germany / ENEC approved. 230V 50Hz tw130. For compact fluorescent lamp. B2 EEI class. High frequency electronic ballast from Vossloh Schwabe - Germany / ENEC approved. 220-240V 0-50-60Hz tc70 A2 EEI class. For 4 pins compact fluorescent lamp.
- WIRING:** 1x0.75 tinned copper silicone rubber insulated cable from CET Electric - Italy / IMQ approved. 2kV / -60°to +180°C service temperature. Connector in PA6.6 nickle-plated brass insert. 600V/24A. -40°to +130°C service temperature. Cross section 2.5mm² VDE approved. Wiring provided with earth connection.
- PAINTING:** First Stage: Chromatzation treatment, resistant to corrosive and extreme environment. Second Stage: Coated with UV stabilized polyester powder in automatic chamber. Third Stage: Baked in digital temperature control room at 200°C for 30 minutes.


## AVAILABLE COLOR:

- Black - RAL9005 (replace last 2 digits on ordering code with 01)
- Graphite - RAL7016 (replace last 2 digits on ordering code with 02)
- Dark Grey - RAL7037 (replace last 2 digits on ordering code with 03)
- Aluminium Silver - RAL9006 (replace last 2 digits on ordering code with 04)
- White - RAL9010 (replace last 2 digits on ordering code with 06)






COMPACT FLUORESCENT  
 Ordering Code:  
**7013-0-3-414-XX**  
 TC G23  
 2x9W (2x600 lm)



COMPACT FLUORESCENT  
 Ordering Code:  
**7013-0-3-423-XX**  
 TC-D G24d-2  
 18W (1200 lm)




COMPACT FLUORESCENT  
 Ordering Code:  
**7014-0-3-428-XX**  
 TC-D G24d-3  
 2x26W (2x1800 lm)


COMPACT FLUORESCENT  
 Ordering Code:  
**7014-0-3-438-XX**  
 TC-TEL Gx24q-4  
 2x42W (2x3200 lm)

E27 COMPACT FLUORESCENT  
 Ordering Code:  
**7013-0-2-493-XX**  
 TC-TSE E27  
 15W (900 lm)

COMPACT FLUORESCENT  
 Ordering Code:  
**7014-0-2-496-XX**  
 TC-TSE E27  
 2x23W (2x1500 lm)



INCANDESCENT  
 Ordering Code:  
**7013-0-2-111-XX**  
 A60 E27  
 60W (730 lm)



TUNGSTEN HALOGEN  
 Ordering Code:  
**7014-0-2-242-XX**  
 QT32 E27  
 100W (1550 lm)



# OD-7015 / OD-7016

WALL/CEILING MOUNT LIGHT




## SPECIFICATION

- CONSTRUCTION:** Fixture is manufactured in compliance with IEC 60598-1 and tested by UL Demko laboratory in Denmark. Electrical protection class 1. IP65.
- BODY:** Housing and cover ring in corrosion resistant high-pressure die-cast aluminium ADC12 alloy.
- OPTIC COVER:** Self-extinguishing high impact resistant opal polycarbonate diffuser. with UV stabilized additive. Material from Bayer - Germany or Teijin - Japan.
- PROTECTION:** Weather proof and durable silicone gasket. Service temperature -40°to +200°C.
- FASTENING:** All external screw is in 316 stainless steel with silicone grease dipping.
- CABLE ENTRY:** Protected by two weather proof IP67 PG11 synthesized rubber grommet for H07RN-F cable 3G x1.0 Possible for through wiring.
- LAMP HOLDER:** G23/G24d-2-3/Gx24q4 holder in PBT phosphor bronze contact from AAG Stucchi - Italy / ENEC approved. For compact fluorescent lamp. T140 rating 2A-250V. E27 ceramic nickle-coated contact from Vossloh Schwabe - Germany / ENEC approved. For incandescent/tungsten halogen lamp. T270 rating 4/250/5kV.
- CONTROL GEAR:** Magnetic ballast from Vossloh Schwabe - Germany / ENEC approved. 230V 50Hz tw130. For compact fluorescent lamp. B2 EEI class. High frequency electronic ballast from Vossloh Schwabe - Germany / ENEC approved. 220-240V 0-50-60Hz tc70 A2 EEI class. For 4 pins compact fluorescent lamp.
- WIRING:** 1x0.75 tinned copper silicone rubber insulated cable from CET Elettric - Italy / IMQ approved. 2kV / -60°to +180°C service temperature. Connector in PA6.6 nickle-plated brass insert. 600V/24A. -40°to +130°C service temperature. Cross section 2.5mm<sup>2</sup>. VDE approved. Wiring provided with earth connection.
- PAINTING:** First Stage: Chromatisation treatment, resistant to corrosive and extreme environment. Second Stage: Coated with UV stabilized polyester powder in automatic chamber. Third Stage: Baked in digital temperature control room at 200°C for 30 minutes.


## AVAILABLE COLOR:

- Black - RAL9005 (replace last 2 digits on ordering code with 01)
- Graphite - RAL7016 (replace last 2 digits on ordering code with 02)
- Dark Grey - RAL7037 (replace last 2 digits on ordering code with 03)
- Aluminium Silver - RAL9006 (replace last 2 digits on ordering code with 04)
- White - RAL9010 (replace last 2 digits on ordering code with 06)

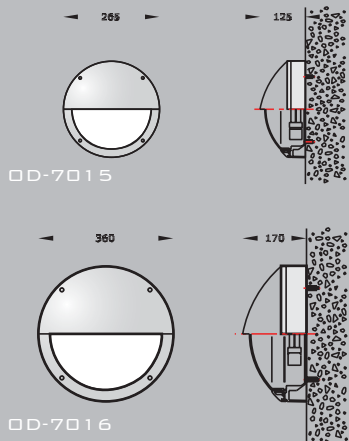

COMPACT FLUORESCENT

Ordering Code:  
**7015-0-3-414-XX**  
TC G23  
2x9W (2x600 lm)




COMPACT FLUORESCENT

Ordering Code:  
**7015-0-3-423-XX**  
TC-D G24d-2  
18W (1200 lm)

COMPACT FLUORESCENT

Ordering Code:  
**7016-0-3-424-XX**  
TC-D G24d-3  
26W (1800 lm)



COMPACT FLUORESCENT

Ordering Code:  
**7016-0-3-436-XX**  
TC-TEL Gx24q-4  
42W (3200 lm)




E27 COMPACT FLUORESCENT

Ordering Code:  
**7015-0-2-493-XX**  
TC-TSE E27  
15W (900 lm)


E27 COMPACT FLUORESCENT

Ordering Code:  
**7016-0-2-495-XX**  
TC-TSE E27  
23W (1500 lm)



INCANDESCENT

Ordering Code:  
**7015-0-2-111-XX**  
A60 E27  
60W (730 lm)




TUNGSTEN HALOGEN

Ordering Code:  
**7016-0-2-242-XX**  
QT32 E27  
100W (1550 lm)

# OD-7047 / OD-7017

WALL/CEILING MOUNT LIGHT

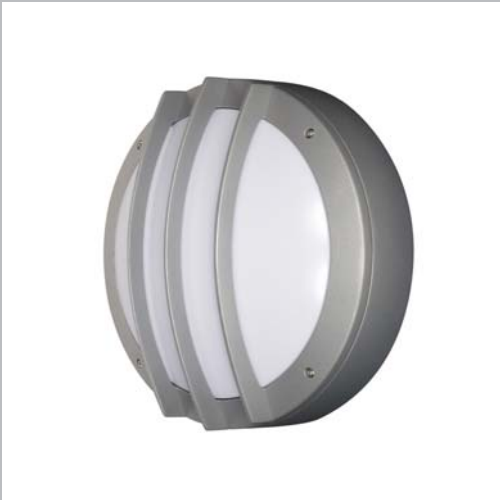



## SPECIFICATION

- CONSTRUCTION:** Fixture is manufactured in compliance with IEC 60598-1 and tested by UL Demko laboratory in Denmark. Electrical protection class 1. IP65.
- BODY:** Housing and cover ring in corrosion resistant high-pressure die-cast aluminium ADC12 alloy.
- OPTIC COVER:** Self-extinguishing high impact resistant opal polycarbonate diffuser. with UV stabilized additive. Material from Bayer - Germany or Teijin - Japan.
- PROTECTION:** Weather proof and durable silicone gasket. Service temperature -40°to +200°C.
- FASTENING:** All external screw is in 316 stainless steel with silicone grease dipping.
- CABLE ENTRY:** Protected by two weather proof IP67 PG11 synthesized rubber grommet for H07RN-F cable 3G x1.0 Possible for through wiring.
- LAMP HOLDER:** G23/G24d-2-3/Gx24q4 holder in PBT phosphor bronze contact from AAG Stucchi - Italy / ENEC approved. For compact fluorescent lamp. T140 rating 2A-250V. E27 ceramic nickle-coated contact from Vossloh Schwabe - Germany / ENEC approved. For incandescent/tungsten halogen lamp. T270 rating 4/250/5kV.
- CONTROL GEAR:** Magnetic ballast from Vossloh Schwabe - Germany / ENEC approved. 230V 50Hz tw130. For compact fluorescent lamp. B2 EEI class. High frequency electronic ballast from Vossloh Schwabe - Germany / ENEC approved. 220-240V 0-50-60Hz tc70 A2 EEI class. For 4 pins compact fluorescent lamp.
- WIRING:** 1x0.75 tinned copper silicone rubber insulated cable from CET Elettric - Italy / IMQ approved. 2kV / -60°to +180°C service temperature. Connector in PA6.6 nickle-plated brass insert. 600V/24A. -40°to +130°C service temperature. Cross section 2.5mm<sup>2</sup> VDE approved. Wiring provided with earth connection.
- PAINTING:** First Stage: Chromatization treatment, resistant to corrosive and extreme environment. Second Stage: Coated with UV stabilized polyester powder in automatic chamber. Third Stage: Baked in digital temperature control room at 200°C for 30 minutes.


## AVAILABLE COLOR:

- Black - RAL9005 (replace last 2 digits on ordering code with 01)
- Graphite - RAL7016 (replace last 2 digits on ordering code with 02)
- Dark Grey - RAL7037 (replace last 2 digits on ordering code with 03)
- Aluminium Silver - RAL9006 (replace last 2 digits on ordering code with 04)
- White - RAL9010 (replace last 2 digits on ordering code with 06)

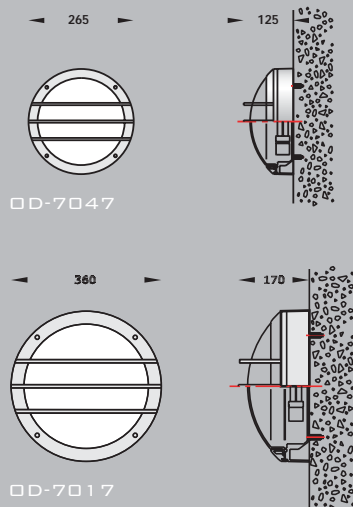




COMPACT FLUORESCENT  
 Ordering Code:  
**7047-0-3-414-XX**  
 TC G23  
 2x9W (2x600 lm)



COMPACT FLUORESCENT  
 Ordering Code:  
**7047-0-3-423-XX**  
 TC-D G24d-2  
 18W (1200 lm)




COMPACT FLUORESCENT  
 Ordering Code:  
**7017-0-3-428-XX**  
 TC-D G24d-3  
 2x26W (2x1800 lm)


COMPACT FLUORESCENT  
 Ordering Code:  
**7017-0-3-438-XX**  
 TC-TEL Gx24q-4  
 2x42W (2x3200 lm)

E27 COMPACT FLUORESCENT  
 Ordering Code:  
**7047-0-2-493-XX**  
 TC-TSE E27  
 15W (900 lm)

E27 COMPACT FLUORESCENT  
 Ordering Code:  
**7017-0-2-496-XX**  
 TC-TSE E27  
 2x23W (2x1500 lm)



INCANDESCENT  
 Ordering Code:  
**7047-0-2-111-XX**  
 A60 E27  
 60W (730 lm)



TUNGSTEN HALOGEN  
 Ordering Code:  
**7017-0-2-242-XX**  
 QT32 E27  
 100W (1550 lm)

# OD-7037 / OD-7038

WALL/CEILING MOUNT LIGHT




## NEW ITEM

### SPECIFICATION


- CONSTRUCTION:** Fixture is manufactured in compliance with IEC 60598-1 and tested by UL Demko laboratory in Denmark. Electrical protection class 1. IP65.
- BODY:** Housing and cover ring in corrosion resistant high-pressure die-cast aluminium ADC12 alloy.
- OPTIC COVER:** Self-extinguishing high impact resistant opal polycarbonate diffuser. with UV stabilized additive. Material from Bayer - Germany or Teijin - Japan.
- PROTECTION:** Weather proof and durable silicone gasket. Service temperature -40°to +200°C.
- FASTENING:** All external screw is in 316 stainless steel with silicone grease dipping.
- CABLE ENTRY:** Protected by two weather proof IP67 PG11 synthesized rubber grommet for H07RN-F cable 3G x1.0 Possible for through wiring.
- LAMP HOLDER:** G23/G24d-2-3/Gx24q4 holder in PBT phosphor bronze contact from AAG Stucchi - Italy / ENEC approved. For compact fluorescent lamp. T140 rating 2A-250V. E27 ceramic nickle-coated contact from Vossloh Schwabe - Germany / ENEC approved. For incandescent/tungsten halogen lamp. T270 rating 4/250/5kV.
- CONTROL GEAR:** Magnetic ballast from Vossloh Schwabe - Germany / ENEC approved. 230V 50Hz tw130. For compact fluorescent lamp. B2 EEI class. High frequency electronic ballast from Vossloh Schwabe - Germany / ENEC approved. 220-240V 0-50-60Hz tc70 A2 EEI class. For 4 pins compact fluorescent lamp.
- WIRING:** 1x0.75 tinned copper silicone rubber insulated cable from CET Electric - Italy / IMQ approved. 2kV / -60°to +180°C service temperature. Connector in PA6.6 nickle-plated brass insert. 600V/24A. -40°to +130°C service temperature. Cross section 2.5mm² VDE approved. Wiring provided with earth connection.
- PAINTING:** First Stage: Chromatization treatment, resistant to corrosive and extreme environment. Second Stage: Coated with UV stabilized polyester powder in automatic chamber. Third Stage: Baked in digital temperature control room at 200°C for 30 minutes.

### AVAILABLE COLOR:


- |                  |  |
|------------------|--|
| Black            | - RAL9005 (replace last 2 digits on ordering code with 01) |
| Graphite         | - RAL7016 (replace last 2 digits on ordering code with 02) |
| Dark Grey        | - RAL7037 (replace last 2 digits on ordering code with 03) |
| Aluminium Silver | - RAL9006 (replace last 2 digits on ordering code with 04) |
| White            | - RAL9010 (replace last 2 digits on ordering code with 06) |

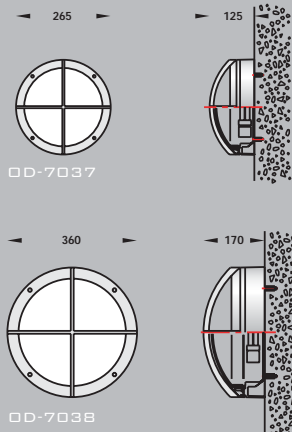


## NEW ITEM



COMPACT FLUORESCENT  
Ordering Code:  
**7037-0-3-414-XX**  
TC G23  
2x9W (2x600 lm)



COMPACT FLUORESCENT  
Ordering Code:  
**7037-0-3-423-XX**  
TC-D G24d-2  
18W (1200 lm)




COMPACT FLUORESCENT  
Ordering Code:  
**7038-0-3-428-XX**  
TC-D G24d-3  
2x26W (2x1800 lm)


COMPACT FLUORESCENT  
Ordering Code:  
**7038-0-3-438-XX**  
TC-TEL Gx24q-4  
2x42W (2x3200 lm)

E27 COMPACT FLUORESCENT  
Ordering Code:  
**7037-0-2-493-XX**  
TC-TSE E27  
15W (900 lm)

E27 COMPACT FLUORESCENT  
Ordering Code:  
**7038-0-2-496-XX**  
TC-TSE E27  
2x23W (2x1500 lm)



INCANDESCENT  
Ordering Code:  
**7037-0-2-111-XX**  
A60 E27  
60W (730 lm)



TUNGSTEN HALOGEN  
Ordering Code:  
**7038-0-2-242-XX**  
QT32 E27  
100W (1550 lm)




**OD-7021 / OD-7041 /  
OD-7042 / OD-7043**

WALL/CEILING MOUNT LIGHT



**OD-7021**

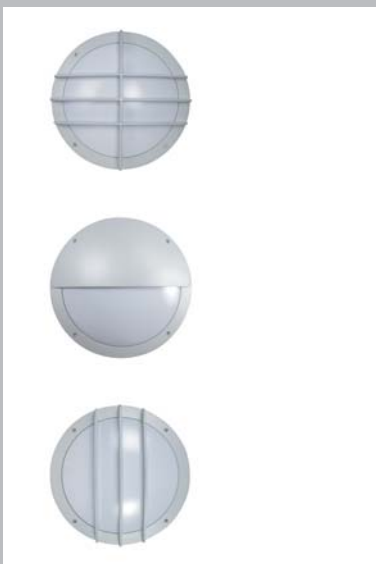

**OD-7041**

**OD-7042**


**OD-7043**

**SPECIFICATION**

- CONSTRUCTION:** Fixture is manufactured in compliance with IEC 60598-1 Electrical protection class 1. IP65.
- BODY:** Housing and cover ring in corrosion resistant high-pressure die-cast aluminium ADC12 alloy.
- OPTIC COVER:** Self-extinguishing high impact resistant opal polycarbonate diffuser. with UV stabilized additive. Material from Bayer - Germany or Teijin - Japan.
- PROTECTION:** Weather proof and durable silicone gasket.  
Service temperature -40°to +200°C.
- FASTENING:** All external screw is in 316 stainless steel with silicone grease dipping.
- CABLE ENTRY:** Protected by two weather proof IP67 PG11 synthesized rubber grommet for H07RN-F cable 3G x1.0 Possible for through wiring.
- LAMP HOLDER:** G23/G24d-3 holder in PBT phosphor bronze contact from AAG Stucchi - Italy / ENEC approved. For compact fluorescent lamp. T140 rating 2A-250V.
- CONTROL GEAR:** Magnetic ballast from Vossloh Schwabe - Germany / ENEC approved. 230V 50Hz tw130. For compact fluorescent lamp. B2 EEI class.
- WIRING:** 1x0.75 tinned copper silicone rubber insulated cable from CET Eletric - Italy / IMQ approved. 2kV / -60°to +180°C service temperature. Connector in PA6.6 nickle-plated brass insert. 600V/24A. -40°to +130°C service temperature. Cross section 2.5mm<sup>2</sup> VDE approved. Wiring provided with earth connection.
- PAINTING:** First Stage: Chromatzation treatment, resistant to corrosive and extreme environment.  
Second Stage: Coated with UV stabilized polyester powder in automatic chamber.  
Third Stage: Baked in digital temperature control room at 200°C for 30 minutes.

**AVAILABLE COLOR:**

- |                  |  |
|------------------|--|
| Black            | - RAL9005 (replace last 2 digits on ordering code with 01) |
| Graphite         | - RAL7016 (replace last 2 digits on ordering code with 02) |
| Dark Grey        | - RAL7037 (replace last 2 digits on ordering code with 03) |
| Aluminium Silver | - RAL9006 (replace last 2 digits on ordering code with 04) |
| White            | - RAL9010 (replace last 2 digits on ordering code with 06) |



COMPACT FLUORESCENT

Ordering Code:

**7021-0-3-415-XX**


**7041-0-3-415-XX**

**7042-0-3-415-XX**

**7043-0-3-415-XX**

TC G23

2x11W (2x900 lm)



COMPACT FLUORESCENT

Ordering Code:

**7021-0-3-428-XX**

**7041-0-3-428-XX**

**7042-0-3-428-XX**

**7043-0-3-428-XX**

TC-D G24d-3

2x26W (2x1800 lm)

# OD-7023

WALL/CEILING MOUNT LIGHT





## SPECIFICATION

- CONSTRUCTION:** Fixture is manufactured in compliance with IEC 60598-1 Electrical protection class 1. IP65.
- BODY:** Housing and cover ring in corrosion resistant high-pressure die-cast aluminium ADC12 alloy.
- OPTIC COVER:** Self-extinguishing high impact resistant opal polycarbonate diffuser. with UV stabilized additive. Material from Bayer - Germany or Teijin - Japan.
- PROTECTION:** Weather proof and durable silicone gasket.  
Service temperature -40°to +200°C.
- FASTENING:** All external screw is in 316 stainless steel with silicone grease dipping.
- CABLE ENTRY:** Protected by two weather proof IP67 PG11 synthesized rubber grommet for H07RN-F cable 3G x1.0 Possible for through wiring.
- LAMP HOLDER:** G23/G24d-2-3/Gx24q4 holder in PBT phosphor bronze contact from AAG Stucchi - Italy / ENEC approved.  
For compact fluorescent lamp. T140 rating 2A-250V.
- CONTROL GEAR:** Magnetic ballast from Vossloh Schwabe - Germany / ENEC approved. 230V 50Hz tw130. For compact fluorescent lamp. B2 EEI class.
- WIRING:** 1x0.75 tinned copper silicone rubber insulated cable from CET Elettric - Italy / IMQ approved. 2kV / -60°to +180°C service temperature. Connector in PA6.6 nickle-plated brass insert. 600V/24A. -40°to +130°C service temperature. Cross section 2.5mm<sup>2</sup> VDE approved.  
Wiring provided with earth connection.
- PAINTING:** First Stage: Chromatzation treatment, resistant to corrosive and extreme environment.  
Second Stage: Coated with UV stabilized polyester powder in automatic chamber.  
Third Stage: Baked in digital temperature control room at 200°C for 30 minutes.


## AVAILABLE COLOR:

- |                  |  |
|------------------|--|
| Black            | - RAL9005 (replace last 2 digits on ordering code with 01) |
| Graphite         | - RAL7016 (replace last 2 digits on ordering code with 02) |
| Dark Grey        | - RAL7037 (replace last 2 digits on ordering code with 03) |
| Aluminium Silver | - RAL9006 (replace last 2 digits on ordering code with 04) |
| White            | - RAL9010 (replace last 2 digits on ordering code with 06) |





COMPACT FLUORESCENT  
Ordering Code:  
**7023-0-3-415-XX**  
TC G23  
2x11W (2x900 lm)



COMPACT FLUORESCENT  
Ordering Code:  
**7023-0-3-428-XX**  
TC-D G24d-3  
2x26W (2x1800 lm)



# OD-7024 / OD-7032

WALL/CEILING MOUNT LIGHT




## SPECIFICATION


- CONSTRUCTION:** Fixture is manufactured in compliance with IEC 60598-1 Electrical protection class 1. IP65.
- BODY:** Housing and cover ring in corrosion resistant high-pressure die-cast aluminium ADC12 alloy.
- OPTIC COVER:** Self-extinguishing high impact resistant opal polycarbonate diffuser. with UV stabilized additive. Material from Bayer - Germany or Teijin - Japan.
- PROTECTION:** Weather proof and durable silicone gasket. Service temperature -40°to +200°C.
- FASTENING:** All external screw is in 316 stainless steel with silicone grease dipping.
- CABLE ENTRY:** Protected by two weather proof IP67 PG11 synthesized rubber grommet for H07RN-F cable 3G x1.0 Possible for through wiring.
- LAMP HOLDER:** G23/G24d-2-3/Gx24q-4 holder in PBT phosphor bronze contact from AAG Stucchi - Italy / ENEC approved. For compact fluorescent lamp. T140 rating 2A-250V. E27 ceramic nickle-coated contact from Vossloh Schwabe - Germany / ENEC approved. For tungsten halogen lamp. T270 rating 4/250/5kV.
- CONTROL GEAR:** Magnetic ballast from Vossloh Schwabe - Germany / ENEC approved. 230V 50Hz tw130. For discharge lamp and B2 class for compact fluorescent lamps. High frequency electronic ballast from Vossloh Schwabe - Germany / ENEC approved. 220-240V 0-50-60Hz tc70 A2 EEI class. For 4 pins compact fluorescent lamp.
- WIRING:** 1x0.75 tinned copper silicone rubber insulated cable from CET Elettric - Italy / IMQ approved. 2kV / -60°to +180°C service temperature. Connector in PA6.6 nickle-plated brass insert. 600V/24A. -40°to +130°C service temperature. Cross section 2.5mm² VDE approved. Wiring provided with earth connection.
- PAINTING:** First Stage: Chromatzation treatment, resistant to corrosive and extreme environment. Second Stage: Coated with UV stabilized polyester powder in automatic chamber. Third Stage: Baked in digital temperature control room at 200°C for 30 minutes.

## AVAILABLE COLOR:

- Black - RAL9005 (replace last 2 digits on ordering code with 01)
- Graphite - RAL7016 (replace last 2 digits on ordering code with 02)
- Dark Grey - RAL7037 (replace last 2 digits on ordering code with 03)
- Aluminium Silver - RAL9006 (replace last 2 digits on ordering code with 04)
- White - RAL9010 (replace last 2 digits on ordering code with 06)




OD-7024



OD-7032

COMPACT FLUORESCENT

Ordering Code:  
**7024-0-3-414-XX**  
TC G23  
2x9W (2x600 lm)




COMPACT FLUORESCENT

Ordering Code:  
**7024-0-3-423-XX**  
TC-D G24d-2  
18W (1200 lm)


COMPACT FLUORESCENT

Ordering Code:  
**7024-0-3-424-XX**  
TC-D G24d-3  
26W (1800 lm)



COMPACT FLUORESCENT

Ordering Code:  
**7032-0-3-428-XX**  
TC-D G24d-3  
2x26W (2x1800 lm)



COMPACT FLUORESCENT

Ordering Code:  
**7032-0-3-438-XX**  
TC-TEL Gx24q-4  
2x42W (2x3200 lm)

E27 COMPACT FLUORESCENT

Ordering Code:  
**7032-0-2-496-XX**  
TC-TSE E27  
2x23W (2x1500 lm)



TUNGSTEN HALOGEN

Ordering Code:  
**7032-0-2-242-XX**  
QT32 E27  
100W (1550 lm)



# OD-7033 / OD-7034

WALL/CEILING MOUNT LIGHT

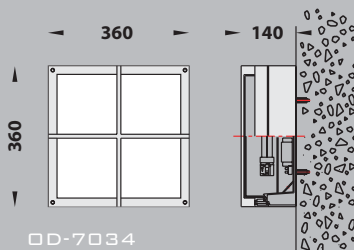

## NEW FOR 2006

THIS IS PROVISION DATA ONLY.  
ACTUAL DIMENSION AND LOOK  
MAY DIFFER FROM THIS.

### SPECIFICATION


- CONSTRUCTION:** Fixture is manufactured in compliance with IEC 60598-1 Electrical protection class 1. IP65.
- BODY:** Housing and cover ring in corrosion resistant high-pressure die-cast aluminium ADC12 alloy.
- OPTIC COVER:** Self-extinguishing high impact resistant opal polycarbonate diffuser. with UV stabilized additive. Material from Bayer - Germany or Teijin - Japan.
- PROTECTION:** Weather proof and durable silicone gasket.  
Service temperature -40°to +200°C.
- FASTENING:** All external screw is in 316 stainless steel with silicone grease dipping.
- CABLE ENTRY:** Protected by two weather proof IP67 PG11 synthesized rubber grommet for H07RN-F cable 3G x1.0 Possible for through wiring.
- LAMP HOLDER:** G23/G24d-2-3/Gx24q-4 holder in PBT phosphor bronze contact from AAG Stucchi - Italy / ENEC approved. For compact fluorescent lamp. T140 rating 2A-250V.  
E27 ceramic nickle-coated contact from Vossloh Schwabe - Germany / ENEC approved. For tungsten halogen lamp. T270 rating 4/250/5kV.
- CONTROL GEAR:** Magnetic ballast from Vossloh Schwabe - Germany / ENEC approved. 230V 50Hz tw130. For discharge lamp and B2 class for compact fluorescent lamps.  
High frequency electronic ballast from Vossloh Schwabe - Germany / ENEC approved. 220-240V 0-50-60Hz tc70 A2 EEI class. For 4 pins compact fluorescent lamp.
- WIRING:** 1x0.75 tinned copper silicone rubber insulated cable from CET Eletric - Italy / IMQ approved. 2kV / -60° to +180°C service temperature. Connector in PA6.6 nickle-plated brass insert. 600V/24A. -40° to +130°C service temperature. Cross section 2.5mm<sup>2</sup> VDE approved. Wiring provided with earth connection.
- PAINTING:** First Stage: Chromatization treatment, resistant to corrosive and extreme environment.  
Second Stage: Coated with UV stabilized polyester powder in automatic chamber.  
Third Stage: Baked in digital temperature control room at 200°C for 30 minutes.

### AVAILABLE COLOR:

- |                  |  |
|------------------|--|
| Black            | - RAL9005 (replace last 2 digits on ordering code with 01) |
| Graphite         | - RAL7016 (replace last 2 digits on ordering code with 02) |
| Dark Grey        | - RAL7037 (replace last 2 digits on ordering code with 03) |
| Aluminium Silver | - RAL9006 (replace last 2 digits on ordering code with 04) |
| White            | - RAL9010 (replace last 2 digits on ordering code with 06) |

## NEW FOR 2006


THIS IS PROVISION DATA ONLY.  
ACTUAL DIMENSION AND LOOK  
MAY DIFFER FROM THIS.




COMPACT FLUORESCENT  
Ordering Code:  
**7033-0-3-414-XX**  
TC G23  
2x9W (2x600 lm)

COMPACT FLUORESCENT  
Ordering Code:  
**7033-0-3-423-XX**  
TC-D G24d-2  
18W (1200 lm)

COMPACT FLUORESCENT  
Ordering Code:  
**7033-0-3-424-XX**  
TC-D G24d-3  
26W (1800 lm)



COMPACT FLUORESCENT  
Ordering Code:  
**7034-0-3-428-XX**  
TC-D G24d-3  
2x26W (2x1800 lm)



COMPACT FLUORESCENT  
Ordering Code:  
**7034-0-3-438-XX**  
TC-TEL Gx24q-4  
2x42W (2x3200 lm)

E27 COMPACT FLUORESCENT  
Ordering Code:  
**7034-0-2-496-XX**  
TC-TSE E27  
2x23W (2x1500 lm)

TUNGSTEN HALOGEN  
Ordering Code:  
**7034-0-2-242-XX**  
QT32 E27  
100W (1550 lm)

# OD-7035 / OD-7036

WALL/CEILING MOUNT LIGHT



## NEW FOR 2006



THIS IS PROVISION DATA ONLY.  
ACTUAL DIMENSION AND LOOK  
MAY DIFFER FROM THIS.

### SPECIFICATION

- CONSTRUCTION:** Fixture is manufactured in compliance with IEC 60598-1 Electrical protection class 1. IP65.
- BODY:** Housing and cover ring in corrosion resistant high-pressure die-cast aluminium ADC12 alloy.
- OPTIC COVER:** Self-extinguishing high impact resistant opal polycarbonate diffuser. with UV stabilized additive. Material from Bayer - Germany or Teijin - Japan.
- PROTECTION:** Weather proof and durable silicone gasket. Service temperature -40°to +200°C.
- FASTENING:** All external screw is in 316 stainless steel with silicone grease dipping.
- CABLE ENTRY:** Protected by two weather proof IP67 PG11 synthesized rubber grommet for H07RN-F cable 3G x1.0 Possible for through wiring.
- LAMP HOLDER:** G23/G24d-2-3/Gx24q-4 holder in PBT phosphor bronze contact from AAG Stucchi - Italy / ENEC approved. For compact fluorescent lamp. T140 rating 2A-250V. E27 ceramic nickle-coated contact from Vossloh Schwabe - Germany / ENEC approved. For tungsten halogen lamp. T270 rating 4/250/5kV.
- CONTROL GEAR:** Magnetic ballast from Vossloh Schwabe - Germany / ENEC approved. 230V 50Hz tw130. For discharge lamp and B2 class for compact fluorescent lamps. High frequency electronic ballast from Vossloh Schwabe - Germany / ENEC approved. 220-240V 0-50-60Hz tc70 A2 EEI class. For 4 pins compact fluorescent lamp.
- WIRING:** 1x0.75 tinned copper silicone rubber insulated cable from CET Eletric - Italy / IMQ approved. 2kV / -60°to +180°C service temperature. Connector in PA6.6 nickle-plated brass insert. 600V/24A. -40°to +130°C service temperature. Cross section 2.5mm<sup>2</sup> VDE approved. Wiring provided with earth connection.
- PAINTING:** First Stage: Chromatzation treatment, resistant to corrosive and extreme environment. Second Stage: Coated with UV stabilized polyester powder in automatic chamber. Third Stage: Baked in digital temperature control room at 200°C for 30 minutes.

### AVAILABLE COLOR:

- Black - RAL9005 (replace last 2 digits on ordering code with 01)
- Graphite - RAL7016 (replace last 2 digits on ordering code with 02)
- Dark Grey - RAL7037 (replace last 2 digits on ordering code with 03)
- Aluminium Silver - RAL9006 (replace last 2 digits on ordering code with 04)
- White - RAL9010 (replace last 2 digits on ordering code with 06)



## **NEW FOR 2006**

THIS IS PROVISION DATA ONLY.  
ACTUAL DIMENSION AND LOOK  
MAY DIFFER FROM THIS.

### COMPACT FLUORESCENT

Ordering Code:  
**7035-0-3-414-XX**  
TC G23  
2x9W (2x600 lm)

### COMPACT FLUORESCENT

Ordering Code:  
**7035-0-3-423-XX**  
TC-D G24d-2  
18W (1200 lm)

### COMPACT FLUORESCENT

Ordering Code:  
**7035-0-3-424-XX**  
TC-D G24d-3  
26W (1800 lm)

### COMPACT FLUORESCENT

Ordering Code:  
**7036-0-3-424-XX**  
TC-D G24d-3  
26W (1800 lm)

### COMPACT FLUORESCENT

Ordering Code:  
**7036-0-3-436-XX**  
TC-TEL Gx24q-4  
42W (3200 lm)

### E27 COMPACT FLUORESCENT

Ordering Code:  
**7036-0-2-495-XX**  
TC-TSE E27  
23W (1500 lm)

### TUNGSTEN HALOGEN

Ordering Code:  
**7036-0-2-242-XX**  
QT32 E27  
100W (1550 lm)

# OD-7026

WALL/CEILING MOUNT LIGHT





## SPECIFICATION

- CONSTRUCTION:** Fixture is manufactured in compliance with IEC 60598-1 and tested by UL Demko laboratory in Denmark. Electrical protection class 1. IP65.
- BODY:** Housing and cover ring in corrosion resistant high-pressure die-cast aluminium ADC12 alloy.
- OPTIC COVER:** Self-extinguishing high impact resistant opal polycarbonate diffuser. with UV stabilized additive. Material from Bayer - Germany or Teijin - Japan.
- PROTECTION:** Weather proof and durable silicone gasket. Service temperature -40°to +200°C.
- FASTENING:** All external screw is in 316 stainless steel with silicone grease dipping.
- CABLE ENTRY:** Protected by two weather proof IP67 PG11 synthesized rubber grommet for H07RN-F cable 3G x1.0 Possible for through wiring.
- LAMP HOLDER:** G23/G24d-3 holder in PBT phosphor bronze contact from AAG Stucchi - Italy / ENEC approved. For compact fluorescent lamp. T140 rating 2A-250V. E27 ceramic nickle-coated contact from Vossloh Schwabe - Germany / ENEC approved. For incandescent lamp. T270 rating 4/250/5kV.
- CONTROL GEAR:** Magnetic ballast from Vossloh Schwabe - Germany / ENEC approved. 230V 50Hz tw130. For compact fluorescent lamp. B2 EEI class.
- WIRING:** 1x0.75 tinned copper silicone rubber insulated cable from CET Eletric - Italy / IMQ approved. 2kV / -60°to +180°C service temperature. Connector in PA6.6 nickle-plated brass insert. 600V/24A. -40°to +130°C service temperature. Cross section 2.5mm<sup>2</sup>. VDE approved. Wiring provided with earth connection.
- PAINTING:** First Stage: Chromatzation treatment, resistant to corrosive and extreme environment.  
Second Stage: Coated with UV stabilized polyester powder in automatic chamber.  
Third Stage: Baked in digital temperature control room at 200°C for 30 minutes.

## AVAILABLE COLOR:

- |                  |  |
|------------------|--|
| Black            | - RAL9005 (replace last 2 digits on ordering code with 01) |
| Graphite         | - RAL7016 (replace last 2 digits on ordering code with 02) |
| Dark Grey        | - RAL7037 (replace last 2 digits on ordering code with 03) |
| Aluminium Silver | - RAL9006 (replace last 2 digits on ordering code with 04) |
| White            | - RAL9010 (replace last 2 digits on ordering code with 06) |





COMPACT FLUORESCENT  
 Ordering Code:  
**7026-0-3-415-XX**  
 TC G23  
 2x11W (2x900 lm)

COMPACT FLUORESCENT  
 Ordering Code:  
**7026-0-3-424-XX**  
 TC-D G24d-3  
 26W (1800 lm)

E27 COMPACT FLUORESCENT  
 Ordering Code:  
**7026-0-2-495-XX**  
 TC-TSE E27  
 23W (1500 lm)

INCANDESCENT  
 Ordering Code:  
**7026-0-2-111-XX**  
 A60 E27  
 60W (730 lm)



# OD-7027

## WALL/CEILING MOUNT LIGHT





### SPECIFICATION

- CONSTRUCTION:** Fixture is manufactured in compliance with IEC 60598-1 and tested by UL Demko laboratory in Denmark. Electrical protection class 1. IP65.
- BODY:** Housing and cover ring in corrosion resistant high-pressure die-cast aluminium ADC12 alloy.
- OPTIC COVER:** Self-extinguishing high impact resistant opal polycarbonate diffuser. with UV stabilized additive. Material from Bayer - Germany or Teijin - Japan.
- PROTECTION:** Weather proof and durable silicone gasket. Service temperature  $-40^{\circ}\text{to } +200^{\circ}\text{C}$ .
- FASTENING:** All external screw is in 316 stainless steel with silicone grease dipping.
- CABLE ENTRY:** Protected by two weather proof IP67 PG11 synthesized rubber grommet for H07RN-F cable 3G x1.0 Possible for through wiring.
- LAMP HOLDER:** G23/G24d-3 holder in PBT phosphor bronze contact from AAG Stucchi - Italy / ENEC approved. For compact fluorescent lamp. T140 rating 2A-250V. E27 ceramic nickle-coated contact from Vossloh Schwabe - Germany / ENEC approved. For incandescent lamp. T270 rating 4/250/5kV.
- CONTROL GEAR:** Magnetic ballast from Vossloh Schwabe - Germany / ENEC approved. 230V 50Hz tw130. For compact fluorescent lamp. B2 EEI class.
- WIRING:** 1x0.75 tinned copper silicone rubber insulated cable from CET Eletric - Italy / IMQ approved. 2kV /  $-60^{\circ}\text{to } +180^{\circ}\text{C}$  service temperature. Connector in PA6.6 nickle-plated brass insert. 600V/24A.  $-40^{\circ}\text{to } +130^{\circ}\text{C}$  service temperature. Cross section 2.5mm<sup>2</sup> VDE approved. Wiring provided with earth connection.
- PAINTING:** First Stage: Chromatization treatment, resistant to corrosive and extreme environment. Second Stage: Coated with UV stabilized polyester powder in automatic chamber. Third Stage: Baked in digital temperature control room at 200°C for 30 minutes.

### AVAILABLE COLOR:

- |                  |  |
|------------------|--|
| Black            | - RAL9005 (replace last 2 digits on ordering code with 01) |
| Graphite         | - RAL7016 (replace last 2 digits on ordering code with 02) |
| Dark Grey        | - RAL7037 (replace last 2 digits on ordering code with 03) |
| Aluminium Silver | - RAL9006 (replace last 2 digits on ordering code with 04) |
| White            | - RAL9010 (replace last 2 digits on ordering code with 06) |





COMPACT FLUORESCENT  
Ordering Code:  
**7027-0-3-415-XX**  
TC G23  
2x11W (2x900 lm)

COMPACT FLUORESCENT  
Ordering Code:  
**7027-0-3-424-XX**  
TC-D G24d-3  
26W (1800 lm)

E27 COMPACT FLUORESCENT  
Ordering Code:  
**7027-0-2-495-XX**  
TC-TSE E27  
23W (1500 lm)

INCANDESCENT  
Ordering Code:  
**7027-0-2-111-XX**  
A60 E27  
60W (730 lm)

# OD-7028

## WALL/CEILING MOUNT LIGHT





### SPECIFICATION

- CONSTRUCTION:** Fixture is manufactured in compliance with IEC 60598-1 and tested by UL Demko laboratory in Denmark. Electrical protection class 1. IP65.
- BODY:** Housing and cover ring in corrosion resistant high-pressure die-cast aluminium ADC12 alloy.
- OPTIC COVER:** Self-extinguishing high impact resistant opal polycarbonate diffuser. with UV stabilized additive. Material from Bayer - Germany or Teijin - Japan.
- PROTECTION:** Weather proof and durable silicone gasket. Service temperature -40°to +200°C.
- FASTENING:** All external screw is in 316 stainless steel with silicone grease dipping.
- CABLE ENTRY:** Protected by two weather proof IP67 PG11 synthesized rubber grommet for H07RN-F cable 3G x1.0 Possible for t hrough wiring.
- LAMP HOLDER:** G23/G24d-3 holder in PBT phosphor bronze contact from AAG Stucchi - Italy / ENEC approved. For compact fluorescent lamp. T140 rating 2A-250V.
- CONTROL GEAR:** Magnetic ballast from Vossloh Schwabe - Germany / ENEC approved. 230V 50Hz tw130. For compact fluorescent lamp. B2 EEI class.
- WIRING:** 1x0.75 tinned copper silicone rubber insulated cable from CET Eletric - Italy / IMQ approved. 2kV / -60°to +180°C service temperature Connector in PA6.6 nickle-plated brass insert. 600V/24A. -40°to +130°C service temperature. Cross section 2.5mm² VDE approved. Wiring provided with earth connection.
- PAINTING:** First Stage: Chromatization treatment, resistant to corrosive and extreme environment.  
Second Stage: Coated with UV stabilized polyester powder in automatic chamber.  
Third Stage: Baked in digital temperature control room at 200°C for 30 minutes.

### AVAILABLE COLOR:

- |                  |  |
|------------------|--|
| Black            | - RAL9005 (replace last 2 digits on ordering code with 01) |
| Graphite         | - RAL7016 (replace last 2 digits on ordering code with 02) |
| Dark Grey        | - RAL7037 (replace last 2 digits on ordering code with 03) |
| Aluminium Silver | - RAL9006 (replace last 2 digits on ordering code with 04) |
| White            | - RAL9010 (replace last 2 digits on ordering code with 06) |





COMPACT FLUORESCENT  
Ordering Code:  
**7028-0-3-415-XX**  
TC G23  
2x11W (2x900 lm)

COMPACT FLUORESCENT  
Ordering Code:  
**7028-0-3-424-XX**  
TC-D G24d-3  
26W (1800 lm)



# OD-7029 / OD-7030

WALL/CEILING MOUNT LIGHT



OD-7029




OD-7030

## SPECIFICATION

- CONSTRUCTION:** Fixture is manufactured in compliance with IEC 60598-1 Electrical protection class 1. IP65.
- BODY:** Cover plate in corrosion resistant high-pressure die-cast aluminium ADC12 alloy. Housing in cast aluminium.
- OPTIC COVER:** Self-extinguishing high impact resistant prismatic/opal polycarbonate diffuser. with UV stabilized additive. Material from Bayer - Germany or Teijin - Japan.
- PROTECTION:** Weather proof and durable silicone gasket. Service temperature -40°to +200°C.
- FASTENING:** All external screw is in 316 stainless steel with silicone grease dipping.
- CABLE ENTRY:** Protected by weather proof IP67 PG11 synthesized rubber grommet for H07RN-F cable 3G x1.0
- LAMP HOLDER:** Gx24d-2 holder in PBT phosphor bronze contact from AAG Stucchi - Italy / ENEC approved. For compact fluorescent lamp. T140 rating 2A-250V.  
E27 ceramic nickle-coated contact from Vossloh Schwabe - Germany / ENEC approved. For tungsten halogen lamp. T270 rating 4/250/5kV.
- CONTROL GEAR:** Magnetic ballast from Vossloh Schwabe - Germany / ENEC approved. 230V 50Hz tw130. For compact fluorescent lamp. B2 EEI class.
- WIRING:** 1x0.75 tinned copper silicone rubber insulated cable from CET Electric - Italy / IMQ approved. 2kV / -60°to +180°C service temperature. Connector in PA6.6 nickle-plated brass insert. 600V/24A. -40°to +130°C service temperature. Cross section 2.5mm<sup>2</sup> VDE approved. Wiring provided with earth connection.
- PAINTING:** First Stage: Chromatization treatment, resistant to corrosive and extreme environment.  
Second Stage: Coated with UV stabilized polyester powder in automatic chamber.  
Third Stage: Baked in digital temperature control room at 200°C for 30 minutes.

## AVAILABLE COLOR:

- |                  |  |
|------------------|--|
| Black            | - RAL9005 (replace last 2 digits on ordering code with 01) |
| Graphite         | - RAL7016 (replace last 2 digits on ordering code with 02) |
| Dark Grey        | - RAL7037 (replace last 2 digits on ordering code with 03) |
| Aluminium Silver | - RAL9006 (replace last 2 digits on ordering code with 04) |
| White            | - RAL9010 (replace last 2 digits on ordering code with 06) |

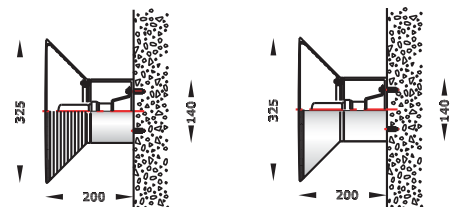

COMPACT FLUORESCENT

Ordering Code:  
**7029-0-3-443-XX**  
**7030-0-3-443-XX**  
TC-T Gx24d-2  
18W (1200 lm)

TUNGSTEN HALOGEN

Ordering Code:  
**7029-0-2-241-XX**  
**7030-0-2-241-XX**  
QT32 E27  
60W (840 lm)



# OD-7051

## ROBUST WALL/CEILING MOUNT LIGHT



## NEW FOR 2006


THIS IS PROVISION DATA ONLY.  
ACTUAL DIMENSION AND LOOK  
MAY DIFFER FROM THIS.

### SPECIFICATION

- CONSTRUCTION:** Fixture is manufactured in compliance with IEC 60598-1 Electrical protection class 1. IP66.
- BODY:** Housing and cover ring in corrosion resistant high-pressure die-cast aluminium ADC12 alloy.
- OPTIC COVER:** Impact resistant frost prismatic safety tempered glass. Able to stand sudden change in temperature of up to 250°C.
- PROTECTION:** Weather proof and durable silicone gasket. Service temperature -40° to +200°C.
- FASTENING:** All external screw is in 316 stainless steel with silicone grease dipping.
- CABLE ENTRY:** Two IP67 M20 brass nickle cable gland for H07RN-F cable 3G x1.5 Possible for through wiring.
- LAMP HOLDER:** G12 holder in ceramic nickle-coated contact from Vossloh Schwabe - Germany / ENEC approved. For discharge lamp. T270 rating 4/250/5kV.  
G24d-3/Gx24q-4 holder in PBT phosphor bronze contact from AAG Stucchi - Italy / ENEC approved. For compact fluorescent lamp. T140 rating 2A- 250V.  
E27 ceramic nickle-coated contact from Vossloh Schwabe - Germany / ENEC approved. For tungsten halogen lamp. T270 rating 4/250/5kV.
- CONTROL GEAR:** Magnetic ballast from Vossloh Schwabe - Germany / ENEC approved. 230V 50Hz tw130. For discharge lamp and B2 class for compact fluorescent lamps.  
Electronic superimposed ignitor with automatic switch-off feature from Vossloh Schwabe - Germany / ENEC approved. Ignition voltage 4-5kV 220-240V 50-60Hz. For ceramic/quartz discharge lamp.  
Power factor correction for discharge lamp from Vossloh Schwabe - Germany or from Electronicon - Germany. ENEC approved.  
High frequency electronic ballast from Vossloh Schwabe - Germany / ENEC approved. 220-240V 0-50- 60Hz tc70 A2 EEI class.  
For 4 pins compact fluorescent lamp.
- WIRING:** 1x0.75 silicone rubber insulated cable with fiberglass braid from CET Eletric - Italy / IMQ approved. 2kV / -60° to +180°C service temperature. Double silicone insulation ignition wire. Tinned copper conductor. Impulsive voltage 5kV.  
Connector in glass-fiber reinforced PA6.6 from BM - Italy / ENEC approved. Service temperature up to 200°C.  
Cross section 4mm<sup>2</sup> Rating 4A/400V. Wiring provided with earth connection.
- PAINTING:** First Stage: Chromatzation treatment, resistant to corrosive and extreme environment.  
Second Stage: Coated with UV stabilized polyester powder in automatic chamber.  
Third Stage: Baked in digital temperature control room at 200°C for 30 minutes.

### AVAILABLE COLOR:

- Black - RAL9005 (replace last 2 digits on ordering code with 01)
- Graphite - RAL7016 (replace last 2 digits on ordering code with 02)
- Dark Grey - RAL7037 (replace last 2 digits on ordering code with 03)
- Aluminium Silver - RAL9006 (replace last 2 digits on ordering code with 04)
- White - RAL9010 (replace last 2 digits on ordering code with 06)

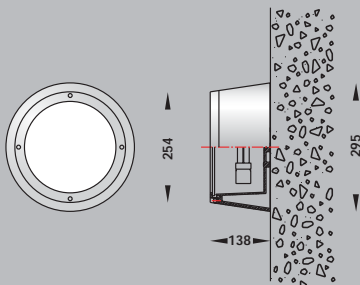

## **NEW FOR 2006**

THIS IS PROVISION DATA ONLY.  
ACTUAL DIMENSION AND LOOK  
MAY DIFFER FROM THIS.

### METAL HALIDE

Ordering Code:

**7051-0-3-751-XX**

HIT-CE G12

35W (3300 lm)

### COMPACT FLUORESCENT

Ordering Code:

**7051-0-3-436-XX**

TC-TEL Gx24q-4

42W (3200 lm)

### COMPACT FLUORESCENT

Ordering Code:

**7051-0-3-424-XX**

TC-D G24d-3

26W (1800 lm)

### TUNGSTEN HALOGEN

Ordering Code:

**7051-0-2-242-XX**

QT32 E27

100W (1550 lm)